


VC Motor - V6 By Pass Series




Voltage : 100 - 240V AC (50/60Hz)
 Rated Speed : 18,000 - 45,000rpm
 Rated Input Power : 300 - 800W
 Blower Diameter : \varnothing 108-110.4mm[4.25-4.35inch]
 Stage : Single
 Suction : 18.14KPa [72.83in-H₂O]
 Volume Flow Rate : 36.0dm³/s [76.28CFM]
 Typical Application : Vacuum Cleaner

Performance Curve

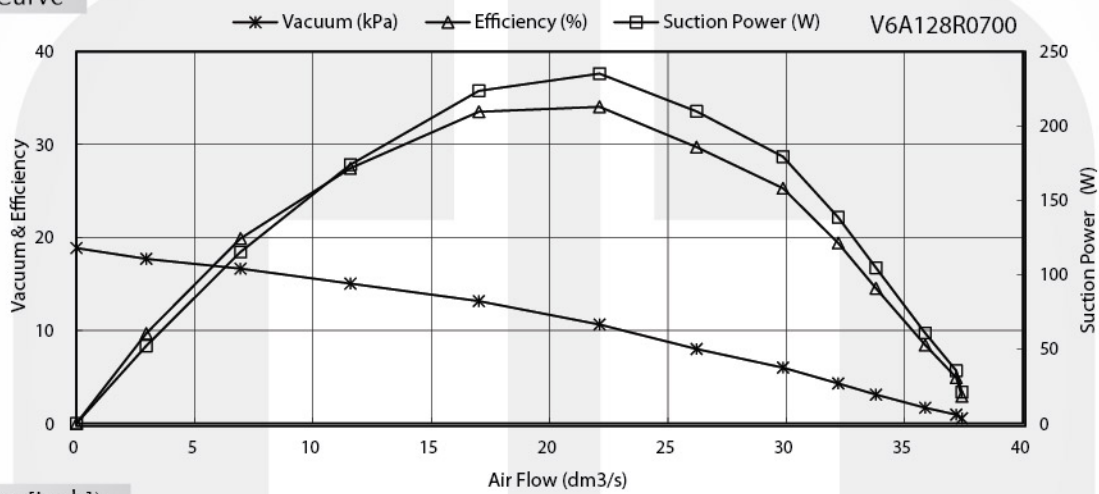

Dimension (mm[inch])

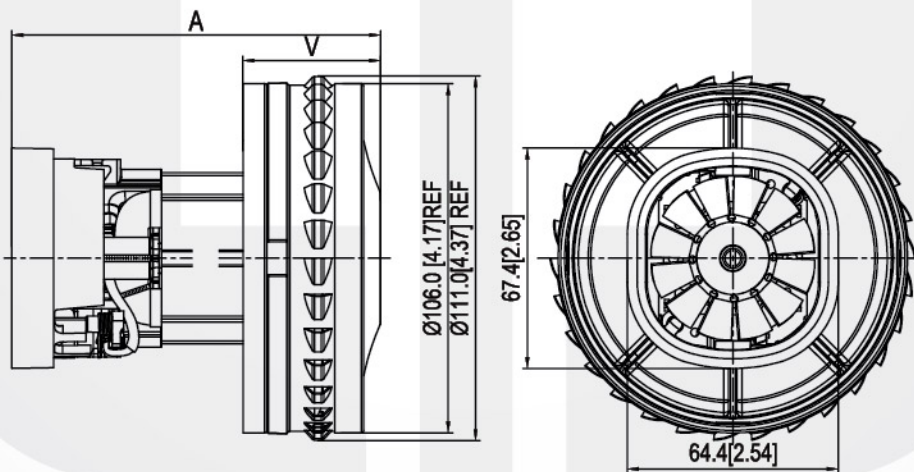

Performance (testing under room temperature)

Model	Dim A mm[inch]	Dim V mm[inch]	Stage	Rated Input Power (W)	Maximum		
					Suction KPa[in-H ₂ O]	Output Power (W)	Volume Flow Rate (dm ³ /s[CFM])
V6A128	114.0[4.49]	39.0[1.54]	Single	600	16.67[66.93]	190	35.0[74.16]
V6A128	112.0[4.41]	43.4[1.71]	Single	700	18.14[72.83]	220	36.0[76.28]

The information above is for reference only, detailed specification is subject to final confirmation